

KL-0214-240, Code 3267679

KN 9.88

DOUBLE SILENT BLOCK TOOL VW

Suitable for double silent blocks on carriers made of steel bent components. Installed e.g. in VW Golf 7 (AU), Golf Sportsvan (AM, AN), Caddy (2K), Tiguan (AD), Touran (5T); Seat Ateca (KH), Leon (5F); Skoda Karoq (NU), Octavia (5E), Superb (3T).

The double silent block tool enables the quick and professional removal and installation of the double silent blocks (silent blocks of the torque arm) directly on the vehicle. It is not necessary to loosen or remove the unit carrier or to carry out a subsequent wheel alignment. *

*Note: Due to the confined space conditions, the carrier must be lowered and corresponding parts loosened on vehicles with all-wheel drive!

Required drive parts:

Hydraulic drive:


KL-0039-1912-1 - tension spindle M12, **KL-0039-1003** - mounting adapter, **KL-0040-2500** - hydraulic cylinder 17t, **KL-0215-35 M25** -hydraulic pump,

Mechanic drive:

KL-0039-2012-1 - tension spindle M12, **KL-0039-1011** - mounting adapter, **KL-0039-1912-2**- Hex collar nut M12

Technical Data:

Max. load:	7t
------------	----

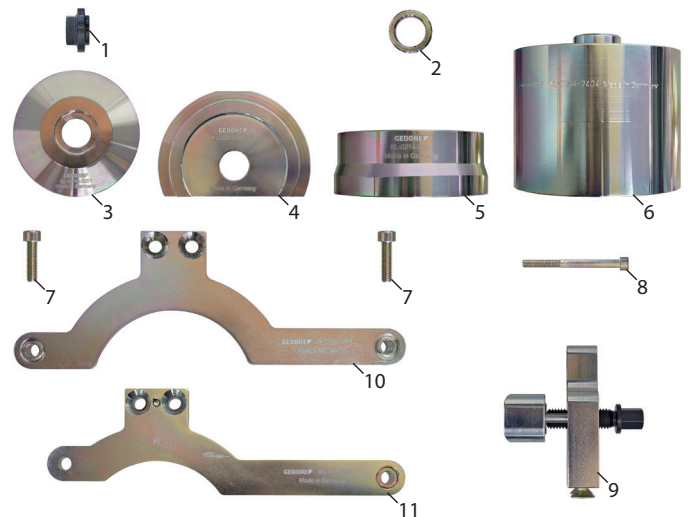

Scope of delivery:

Item	Part no.	Description	Qty
	KL-0214-240	Double silent block tool VW	1
<i>consisting of:</i>			
1	KL-0039-1912-3	Hex collar nut M12 flat	1
2	KL-0214-2202	Spacer ring, Ø 30mm	1
3	KL-0214-2201	Thrust piece, Ø 89.5mm	1
4	KL-0214-2203 A	Position plate	1
5	KL-0214-2204	Conical sleeve, Ø 90mm	1
6	KL-0214-2404	Support sleeve, Ø 98mm	1
7	KL-1283-1016	Cheese-head screw M8 x 30mm	2
8	KL-0041-7306	Cheese-head screw M6 x 70mm	1
9	KL-0214-2401	Pretensioning device	1
10	KL-0214-2402	Pretensioning plate A	1
11	KL-0214-2403	Pretensioning plate B	1

KL-0214-241 - Supplementary kit for KL-0214-220

The supplementary kit enables, in conjunction with the pulling device for double silent blocks - **KL-0214-220**, the quick and professional removal and installation of the double silent blocks (silent blocks of the torque arm) directly on the vehicle.

* All information and prices are subject to typographical and printing errors.

0214-240e200407